

06/15/99

JCS45 U.S. PTO

UTILITY
PATENT APPLICATION
TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. Davis100

First Inventor or Application Identifier: Jeffrey Davis

Title: METHOD AND APPARATUS FOR CONTROLLING A PUMPING
UNIT

Express Mail Label No.: EH810362111US

JCS45 U.S. PTO
09/334208

06/15/99

APPLICATION ELEMENTS

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ * Fee Transmittal Form (e.g. PTO/SB/17)
(submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 9]
- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R&D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure
3. ☒ Drawings(s) (35 U.S.C. 113) [Total Sheets 2/1]
4. ☒ Declaration and Power of Attorney [Total Pages 2]
a. ☒ Newly executed (original or copy)
b. ☐ Copy from a prior application (37 C.F.R. § 63(d)
(for continuation/divisional with Box 16 completed)
i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33 (b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & documentation)
8. ☐ 37 C.F.R. § 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
9. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
10. ☐ Preliminary Amendment
11. ☒ Return Receipt Postcard (MPEP 503)
(should be specifically itemized)
12. ☒ *Small Entity Statement(s) ☐ Statement filed in prior application (PTO/SB?09-12 Status still proper and desired
13. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
14. ☐ Other:

15. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.

Prior application information: Examiner Group/Art Unit:

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

16. CORRESPONDENCE ADDRESS

Name: Ray G. Wilson

Address: 233 Rover Blvd.

City: Los Alamos

State: New Mexico

Zip Code 87544

Country: United States

Telephone: (505) 66503112

Fax: (505) 672-1511

Name (Print/Type): Ray G. Wilson

Registration No. (Attorney/Agent): 28,351

Signature: Ray G. Wilson

Date: June 15, 1999

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Jeffrey Davis :
Serial No. : (Davis100) :
Filed : :
For : METHOD AND APPARATUS FOR :
CONTROLLING A PUMPING UNIT :
.....

Assistant Commissioner for Patents
Washington, DC 20231

DECLARATION CLAIMING SMALL ENTITY STATUS -
INDIVIDUAL INVENTOR

Sir:

I hereby declare that I am:

Jeffrey Davis
P.O. Box 509
La Plata, NM 87418

I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(e) for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, with regard to the subject invention described in the above identified patent application.

I hereby declare that rights under contract or law remain with me with regard to the above identified-invention.

If the rights held by me are not exclusive, each individual, concern or organization having rights in the invention is listed below and no rights to the invention are held by any person, other than the me, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Name: _____

0034203-0459
0044660

Address _____

____ Individual ____ Small Business Concern ____ Nonprofit Org.

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss or entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as an individual inventor is no longer appropriate.

I hereby declare that all statements made herein of my knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application of any patent issuing thereon, or any patent to which this verified statement is directed.

 _____
Jeffrey Davis

Dated 6-9-99

665430-804460

659790-304480

METHOD AND APPARATUS FOR CONTROLLING A PUMPING UNIT

Inventor: Jeffrey Davis
P.O. Box 509
La Plata, NM 87418

CITIZEN OF THE UNITED STATES

EXPRESS MAIL LABEL NO. EH810362111US

FIELD OF THE INVENTION

5

10

15

20

It will be appreciated that replacing down hole components as a result of wear is expensive and time consuming since the entire pump string must be removed and refurbished. For example, if the duty cycle of a pumping unit is reduced by a factor of four, the replacement cycle period for down hole components is increased by a factor of four with a substantial reduction in costs and increase in well utilization.

Pumping units typically may be powered by electric motors or by natural gas powered engines. Where electric motors are used, the motor may be simply turned on and off according to a predetermined cycle to control the pumping cycle and concomitant liquid level. But in remote locations where engines are used, it is not desirable to turn the engines on and off because of reliability problems, reduced battery life under repeated start cycles, and the labor needed to periodically return to a pump site. Until the present invention, there has not been a suitable control system for providing a reliable duty cycle from pumps using natural gas engines.

Various objects, advantages and novel features of the invention will be set forth in part in the description which follows, and in part will become apparent to those skilled in the art upon examination of the following or may be learned by practice of the invention. The objects and advantages of the invention may be realized and attained by means of the instrumentalities and combinations particularly pointed out in the appended claims.

SUMMARY OF THE INVENTION

To achieve the foregoing and other objects, and in accordance with the purposes of the present invention, as embodied and broadly described herein, this invention provides a method for reducing the pumping duty cycle of a pump assembly associated with a pumping oil, natural gas, or water well. An engine is connected with a pump assembly through a pneumatically actuated clutch and a selected event is determined to actuate the clutch to connect the engine with the pump assembly. A pressurized gas is supplied on the occurrence of the selected event to actuate the clutch to connect the pump assembly with the engine to remove liquid from the gas well to maintain an inflow of hydrocarbons from the producing formation.

In another characterization of the present invention, a pumping assembly maintains gas flow from a gas well or oil production from an oil well. A pumping

assembly pumps liquid from the gas well with an engine for driving the pumping assembly, where a pneumatic clutch connects the engine with the pumping assembly. A control unit actuates the pneumatic clutch when needed to pump liquid from the gas well to maintain an inflow of hydrocarbons from the producing formation.

5

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and form a part of the specification, illustrate the present invention and, together with the description, serve to explain the principles of the invention. In the drawings:

10 FIGURE 1 is a pictorial illustration of a controlled pumping unit according to the present invention.

FIGURE 2 is a schematic of an exemplary control system for actuating a pumping unit.

15 FIGURE 3 is a cross-section of a gas-actuated clutch for use in the pumping unit shown in FIGURE 1.

DETAILED DESCRIPTION

20 In accordance with the present invention, a gas actuated clutch is used to connect a natural gas powered engine to a pumping unit to cycle the pumping unit as needed to maintain a fluid level in a borehole between selected elevations and maintain a sustained inflow of hydrocarbons from the producing formation. The actuating gas is preferably natural gas from the well so that the actuating component is conveniently available at the well site.

25 Figure 1 is a pictorial illustration of one embodiment of the present invention. Pump unit 10 is comprised of a pump having lever arm 12, support pivot 14, crank arm 16 and sucker rods 18. Crank arm 16 operates as a conventional crank shaft and converts rotary motion from pneumatic clutch 28 to reciprocating motion for vertically pivoting lever arm 12 about support pivot 14 and vertically move attached sucker rods 18. Internal borehole pump configurations are well known and are not described herein.

30 Liquid, usually oil and water, is removed from the borehole and collected by associated piping and tanks (not shown) for periodic collection and sale or disposal.

66790-804EE60

Figure 1 shows the power components (clutch 28, flywheel 26, and engine 24) in-line with the pump components for ease of depiction. Usually the power components are perpendicular to the pump components to simplify the connection of crankshaft 16 to lever arm 12. It will be appreciated that the configuration of the engine drive

components in Figure 1 is only exemplary and many different arrangements of the components may be made and still achieve the advantages of the present invention.

Clutch 28 is powered by engine 24. In one embodiment, flywheel 26 is interposed between engine 24 and clutch 28 to smooth the rotary motion of clutch 28 when connected to crankshaft 16 so that a smooth vertical motion is imparted to sucker rods 18. Engine 24 is preferably powered by natural gas from dryer 46, but another gas supply might be provided.

Natural gas from the well borehole exits through gas outlet 32 and may pass through a dryer 46 for removing entrained liquid in the gas. The gas is pressurized and pumps are not required for creating a flow of the gas. Most of the gas exits dryer 46 for collection and sale, but some of the gas is returned through a manifold line 34 to power engine 24 and, in accordance with the present invention, to control unit 36 through line 28 to actuate pneumatic clutch 28.

Control unit 36 acts to provide gas for engaging clutch 28 to connect engine 24 with crank arm 16. Thus, pumping action can be on a periodic basis as needed to keep a maximum fluid hydrostatic head within the borehole and to maintain a flow of natural gas. Control unit 36 may be a simple timer unit that is powered by a remote power supply such as batteries, photovoltaic cells, and the like, or using a battery that is charged by a generator (not shown) connected to engine 24. The timing cycle may be set manually by observing the rate of accumulation of fluid in the borehole and adjusting the duty cycle of pumping unit 10 to maintain a fluid elevation between selected limits.

In another embodiment, the actual fluid level in the casing is monitored directly by, e.g., liquid level monitor 42, which may use sonic transducers, radar, or light to interrogate the liquid surface level. A suitable liquid level monitor 42 is sold under the tradename Echo Meter. Now, clutch 28 is engaged whenever the fluid level in the casing-tubing annulus actually reaches a predetermined minimum height and is disengaged when the fluid level is pumped down to a predetermined depth.

For either a timing unit or a level monitoring unit, a simple arrangement of solenoid valve or valves is actuated to supply gas to pneumatic clutch 28 or to exhaust gas from pneumatic clutch 28. Circuitry for actuating solenoid valves in response to a signal from a clock circuit or from a level monitor is well known and an exemplary embodiment is shown in Figure 2. Natural gas from the well head is provided to control unit 36 through input line 34. A first, coarse regulator 82 provides a regulated gas pressure to volume pot 84, which accumulates high pressure gas and then supplies low pressure gas through second, fine regulator 86 in sufficient volume to actuate the pneumatic clutch 28 (Figure 1). Solenoid 88 is actuated to provide gas to clutch 28 through line 38 or to exhaust gas from clutch 28. Solenoid 88 may be timer controlled or may be controlled by liquid level monitor 42 (Figure 1) on well head 22.

Figure 3 is a cross-section of an exemplary pneumatic clutch 28 for use in the pump assembly 10 shown in Figure 1. Rotary motion from engine 24 (Figure 1) is transmitted by shaft 52 to clutch plate 56. Clutch hub 60 engages clutch plate 56 through clutch bladder 58. When clutch bladder 58 is pressurized, clutch hub 60 is connected to clutch plate 56 and the rotary motion of engine 24 is transmitted to shaft 64 to, e.g., flywheel 72 for connecting to crankshaft 16 (Figure 1) and translating rotary motion into vertical motion. Shaft 64 may also be connected to a gear (not shown) for actuating a gear box (not shown) for increasing the torque to move crank arm 16. Any number of mechanical configurations are known for connecting the rotary output of pneumatic clutch 28 to crankshaft 16.

Clutch bladder 58 is pressurized by supplying a pressurized gas through gas supply line 38 into stationary hub 68 and through axial cavity 66 of shaft 64 to clutch bladder 58. The pressurized gas is preferably natural gas from the adjacent well head, but any source of a compressed gas could be used, such as a compressed air tank or an air compressor powered by natural gas from the well. Stationary hub 68 is connected to shaft 64 for relative rotation therebetween and is sealed to shaft 64 to permit the introduction of pressurized gas into clutch bladder 58. A suitable clutch is sold under the tradename Oil States Clutch, Expanding or Contracting.

Control unit 36 (Figure 1), thus, connects and exhausts pressurized gas within clutch bladder 58 to intermittently connect clutch plate 56 to clutch hub 60. Pumping

assembly 10 then intermittently pumps liquid from well bore 22 so that a hydrocarbon inflow is maintained while greatly reducing the wear on pumping assembly 10 and, more particularly, the piping string and associated components within well bore 22.

5 The foregoing description of the invention has been presented for purposes of illustration and description and is not intended to be exhaustive or to limit the invention to the precise form disclosed, and obviously many modifications and variations are possible in light of the above teaching.

10 The embodiments were chosen and described in order to best explain the principles of the invention and its practical application to thereby enable others skilled in the art to best utilize the invention in various embodiments and with various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the claims appended hereto.

0934208-064599

WHAT IS CLAIMED IS:

1. A method for reducing the pumping duty cycle of a pump assembly associated with a pumping well comprising the steps of:

connecting an engine with a pump assembly through a pneumatically actuated clutch;

5 determining a selected event to actuate the clutch to connect the engine with the pump assembly; and

providing a pressurized gas on the occurrence of the selected event to actuate the clutch to connect the pump assembly with the engine to remove liquid from the gas well to maintain an inflow of hydrocarbons from a producing formation.

2. A method according to Claim 1, wherein the selected event is selected from the events comprising a periodic time interval and a liquid level in the gas well.

3. A method according to Claim 1, where the pressurized gas is supplied from natural gas exiting the gas well.

4. A method according to Claim 3, wherein the selected event is selected from the events comprising a periodic time interval and a liquid level in the gas well.

5. A method according to Claim 1, where the selected event is determined by monitoring the liquid level in the gas well with time and determining a pumping cycle effective to maintain an inflow of hydrocarbons from the producing formation.

6. A method according to Claim 5, where the pressurized gas is supplied from natural gas exiting the gas well.

7. A method according to Claim 1, where the selected event is determined by directly monitoring the level of liquid in the well and actuating the pump assembly to maintain the liquid level between selected elevations to maintain an inflow of hydrocarbons from the producing formation while reducing the pump assembly duty cycle.

8. A method according to Claim 7, where the pressurized gas is supplied from natural gas exiting the well.

00334208-061599

9. A pumping assembly for maintaining hydrocarbon production from a well, comprising:

a pumping assembly for pumping liquid from the gas well;
 an engine for driving the pumping assembly;
 a pneumatic clutch for connecting the engine with the pumping assembly; and
 a control unit for actuating the pneumatic clutch when needed to pump liquid from the gas well to maintain hydrocarbon production from the well.

10. A pumping assembly according to Claim 9, wherein the control unit connects gas from the well to the pneumatic clutch for actuating the clutch.

11. A pumping assembly according to Claim 10, wherein the control unit is a timer for periodically actuating the clutch.


12. A pumping assembly according to Claim 9, further including means for monitoring a liquid level in the gas well and outputting a signal indicative of the liquid level.

13. A pumping assembly according to Claim 12, wherein the control unit receives the signal indicative of the liquid level and actuates the clutch to maintain the liquid level below a maximum height to maintain hydrocarbon production from the well.

ABSTRACT

Method and apparatus reduce the pumping duty cycle of a pump assembly associated with an oil, natural gas, or water well with a concomitant reduction in the wear associated with the pump down hole components. An engine is connected with a pump assembly through a pneumatically actuated clutch and a selected event is determined to actuate the clutch to connect the engine with the pump assembly. The selected events may be a timed cycle determined from observations or a direct determination of liquid level in the well bore so that hydrocarbon production is maintained from the well bore. A pressurized gas is supplied on the occurrence of the selected event to actuate the clutch to connect the pump assembly with the engine to remove liquid from the gas well to maintain hydrocarbon production from the well.

FIG. 1

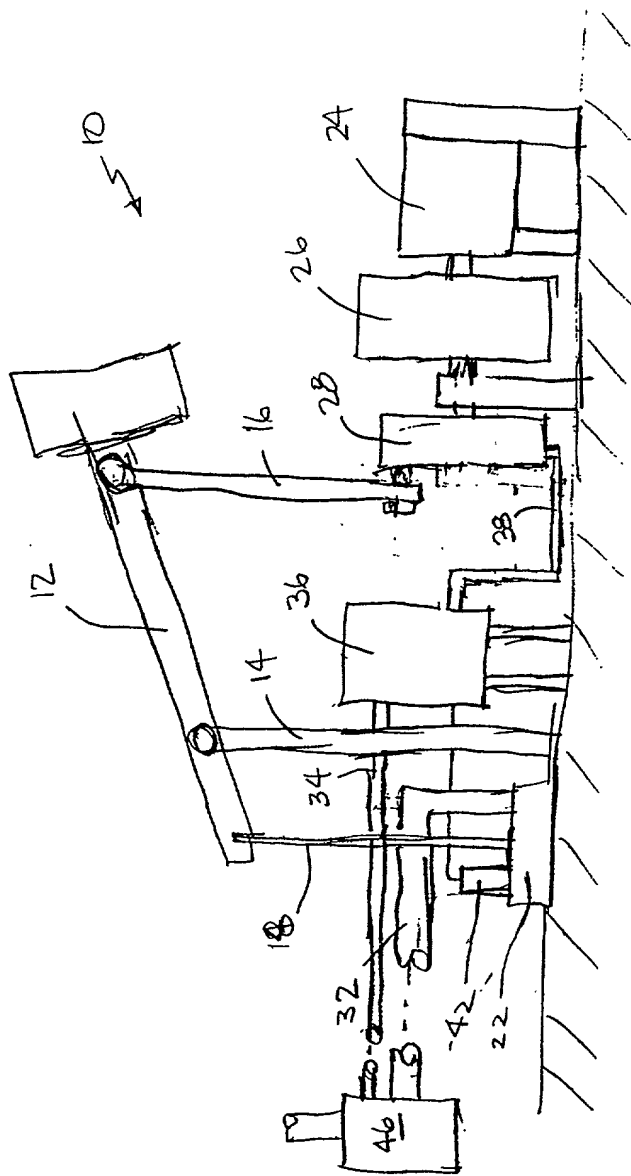

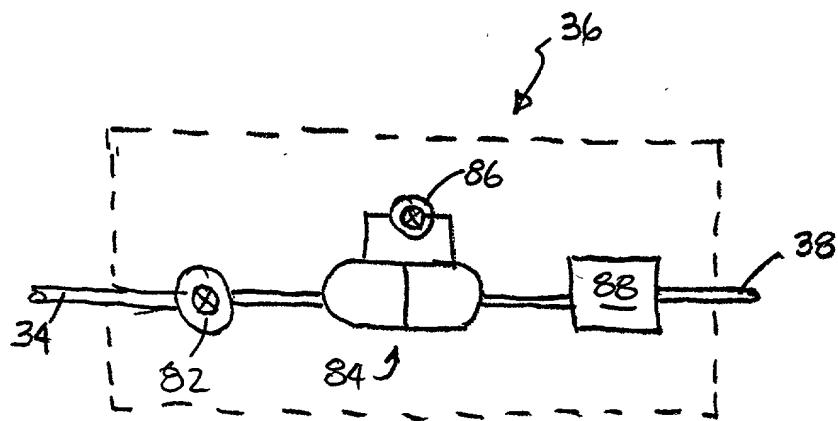


FIG. 2

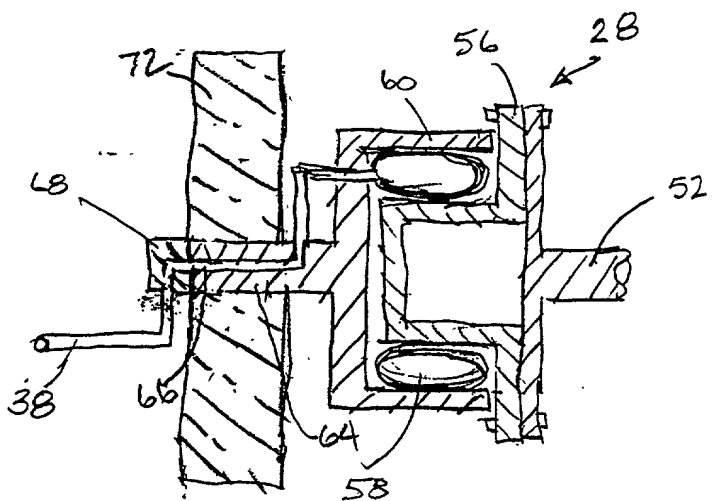


FIG. 3.

655790-8024260

COMBINED DECLARATION AND POWER OF ATTORNEY

As the below named inventor(s), I (we) hereby declare that:

My (Our) residence, post office address and citizenship(s) are as stated below next to my (our) name(s).

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR CONTROLLING A PUMPING UNIT

the specification of which (check one) ☒ is attached hereto ☐ was filed on _____ as Serial No. _____ and was amended on _____ (if applicable).

I (We) hereby state that I (we) have reviewed and understand the contents of the above-identified specification, including claims, as amended by any amendment referred to above.

I (We) acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 CFR 1.56.

I (We) hereby claim foreign priority benefits under 35 USC §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

Number	Country	Filed (Day/Month/Year)	Priority Claimed <input type="checkbox"/> <input type="checkbox"/> Yes No

PRIOR U.S. APPLICATIONS

I hereby claim the benefit under 35 USC §119(e) of any United States provisional application(s) listed below:

(Application Number)	Filing Date
(Application Number)	Filing Date

I (We) hereby claim the benefit under 35 USC §120 of any United States application(s) listed below and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 USC §112, I acknowledge the duty to disclose material information as defined in 37 CFR 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Serial No.	Filing Date	Status


POWER OF ATTORNEY

As the named inventor(s), I (we) hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Names and Registration Nos.	Names and Registration Nos.
Ray G. Wilson 28,351	
<u>Send Correspondence To:</u> Ray G. Wilson 233 Rover Blvd. Los Alamos, NM 87544	<u>Direct Telephone Calls to:</u> Ray G. Wilson (505) 665-3112

DECLARATION

I (We) hereby declare that all statements made herein of my (our) own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 USC §1001 and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Jeffrey Davis	
Full Name of Inventor	Signature
La Plata, New Mexico	6-9-99
Residence (City, State or Foreign Country)	Date
P.O. Box 509	U.S.
La Plata, NM 87418	
Postal Address (Street, City, State, Zip Code)	Citizenship

669790-8024260